


# SID Triton Series

## Datasheet

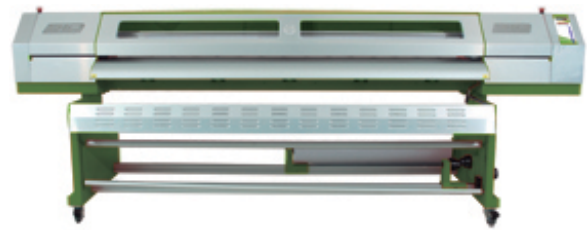

### Parameters

### SID TRITON TX 180

Printhead	1440 nozzles • Variable dots • 7.0 to 21 picoliters
Number of printheads	2 printheads
Resolution	1440 dpi
Ink	● Type Dye Ink
	● Color 4 colors (CMYK)
	● Capacity 1 liter per color
Media	● Max. printing width 71" (1,800 mm)
	● Max. media width 72" (1,830 mm)
	● Feeding System Equipped
	● Types Polyester
Print Speed	up to 430 sq.ft./h (40 m <sup>2</sup> /h)
	269 sq.ft./h (25 m <sup>2</sup> /h)
	236 sq.ft./h (22 m <sup>2</sup> /h)
	161 sq.ft./h (15 m <sup>2</sup> /h)
Cleaning System	Auto cleaning
Heating and Cooling System	Preheater, middle and front heaters and cooling fans
Interface	USB 2.0
Rip Software	Photo PRINT
Voltage	AC 220 V, 50 Hz / 60 Hz
Power Consumption	Heater: 1,200W (5,5A) Printer: 560W (2.5A)
Operational Temperature	68° - 77° F (20° - 25° C) Humidity 40 - 60%, non condensing
Printer Dimension (Length x Width x Height)	121" x 39" x 49" (3,080 x 990 x 1,250 mm)
Package Dimension (Length x Width x Height)	125" x 43" x 34,25" (3,190 x 1,100 x 870 mm)
Printer weight	511 lbs (232 kg)
Package weight	882 lbs (400 kg)